



Kiosk Assembly & Installation Manual

Step-by-step guide for assembling the Streffie AI Stress Detection Kiosk.
No special skills required. Complete setup in under 15 minutes.

Table of Contents

About This Manual

What is Streffie?

Who Should Use This Manual?

Before You Begin

Quick Reference

Section 1 What's in the Box

Parts List

Part Identification Guide

Section 2 Tools You Will Need

Section 3 Assembly - Step by Step

Step 1 Attach Lower Column Body to Oval Base

Step 2 Attach Upper Column Body (Lock Body)

Step 3 Route the Charging Cable

Step 4 Mount the Tab Frame

Step 5 Connect the Charging Cable to the Tablet

Step 6 Clip the Branded Front Cover On

Step 7 Lock the Back Door and Store the Keys

Section 4 Safety

Placement

Power and Electrical

Moving the Kiosk

Children and Users

Section 5 Care and Maintenance

Cleaning

Weekly Checks


Software Issues

About This Manual

This guide will walk you through putting together your Streffie Kiosk. You do not need any special skills. Just follow each step in order and you will have it ready in under 30 minutes. If the software is not working once the kiosk is built, do not attempt to fix it yourself. Call or write to Solh Wellness directly: sales@solhapp.com | atishay@solhapp.com

Fully Assembled — Streffie Kiosk

FRONT VIEW

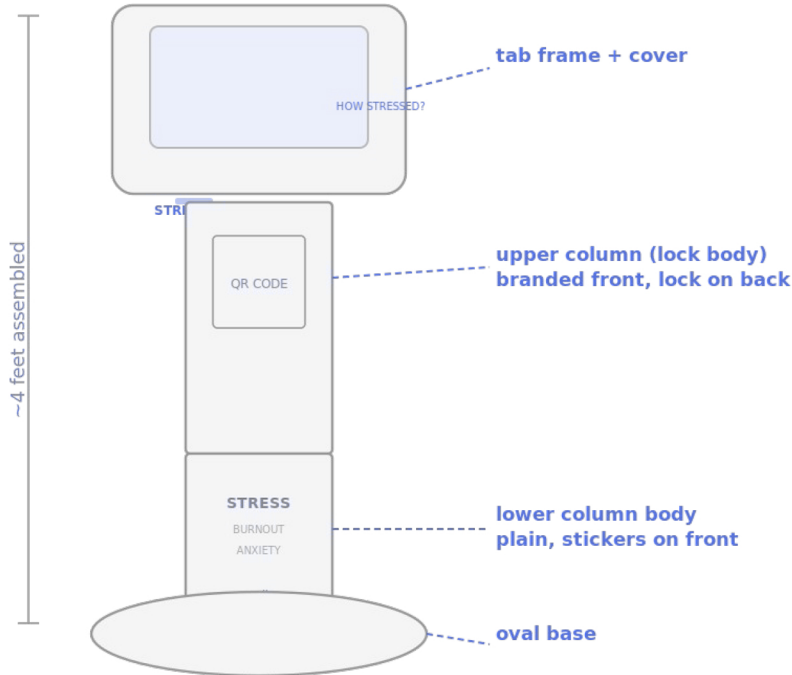

What is Streffie?

Streffie is an AI-powered stress detection kiosk. Users stand in front of the screen and the built-in camera runs a quick, contactless scan that reads facial micro-expressions and physiological markers. Within seconds, the screen shows a stress score with a colour-coded zone: Green (Low Stress), Yellow (Moderate), Orange (High), or Red (Very High).

The kiosk is designed for placement in schools, colleges, corporate offices, hospitals, healthcare facilities, and other organisations where regular stress awareness can support mental wellness.

Who Should Use This Manual?

This manual is for the person responsible for physically assembling and placing the kiosk at the deployment location. No technical background is needed. Software setup, calibration, and app configuration are handled separately by the Solh Wellness team.

Before You Begin

Find a clean, flat work surface such as a table or hard floor. Unpack all parts from the box and lay them out. Check everything against the parts list in Section 1 before you begin assembly. Keep the packaging material until the kiosk is fully set up and working.

Assembly requires two tools (both included): an Allen key for the base bolts and a screwdriver with Phillips head bits for the column screws. No drilling, cutting, or gluing is involved at any stage.

Once assembled, choose the kiosk location carefully. It should be on a flat, hard floor with good ambient lighting, away from direct sunlight, and with at least 3 feet of clear space in front for users to stand comfortably. See Section 4 for detailed placement and safety guidelines.

Quick Reference

Estimated assembly time: Under 30 minutes

Tools required: Allen key + Phillips screwdriver

Total parts: 9 items (listed in Section 1)

Section 1 What's in the Box

Before you start, lay everything flat on the floor or a table. Check that all parts below are present.


#	Part Name	Qty
1	Lower Column Body	1
2	Upper Column Body (Lock Body - cam lock on back door)	1
3	Oval Base	1
4	Tab Frame (white landscape enclosure with two speaker grilles and camera hole)	1
5	Tab Frame Front Cover (printed: Streffie logo + "How Stressed Are You Today?")	1
6	Charging Cable (black)	1
7	Allen Keys (hex wrenches)	2
8	Screwdriver with Phillips head bits	1
9	Cam Lock Keys	2

Verify that all 9 items are present before starting assembly. If any part is missing or damaged, contact Solh Wellness before proceeding. Do not substitute parts from other sources.

Part Identification Guide

The following diagram shows each component with its number label. Use this visual reference to identify parts as you unpack. The Lower Column Body (1) and Upper Column Body (2) are the largest items. The Oval Base (3) has a metal mounting plate on its underside. The Tab Frame (4) is the white landscape enclosure with speaker grilles and a camera hole. The Front Cover (5) has the Streffie branding printed on it. Smaller items include the Charging Cable (6), two Allen Keys (7), a Screwdriver (8), and two Cam Lock Keys (9). Keep the cam lock keys in a safe place as they are needed to lock and unlock the back door of the kiosk

Kiosk Components Overview

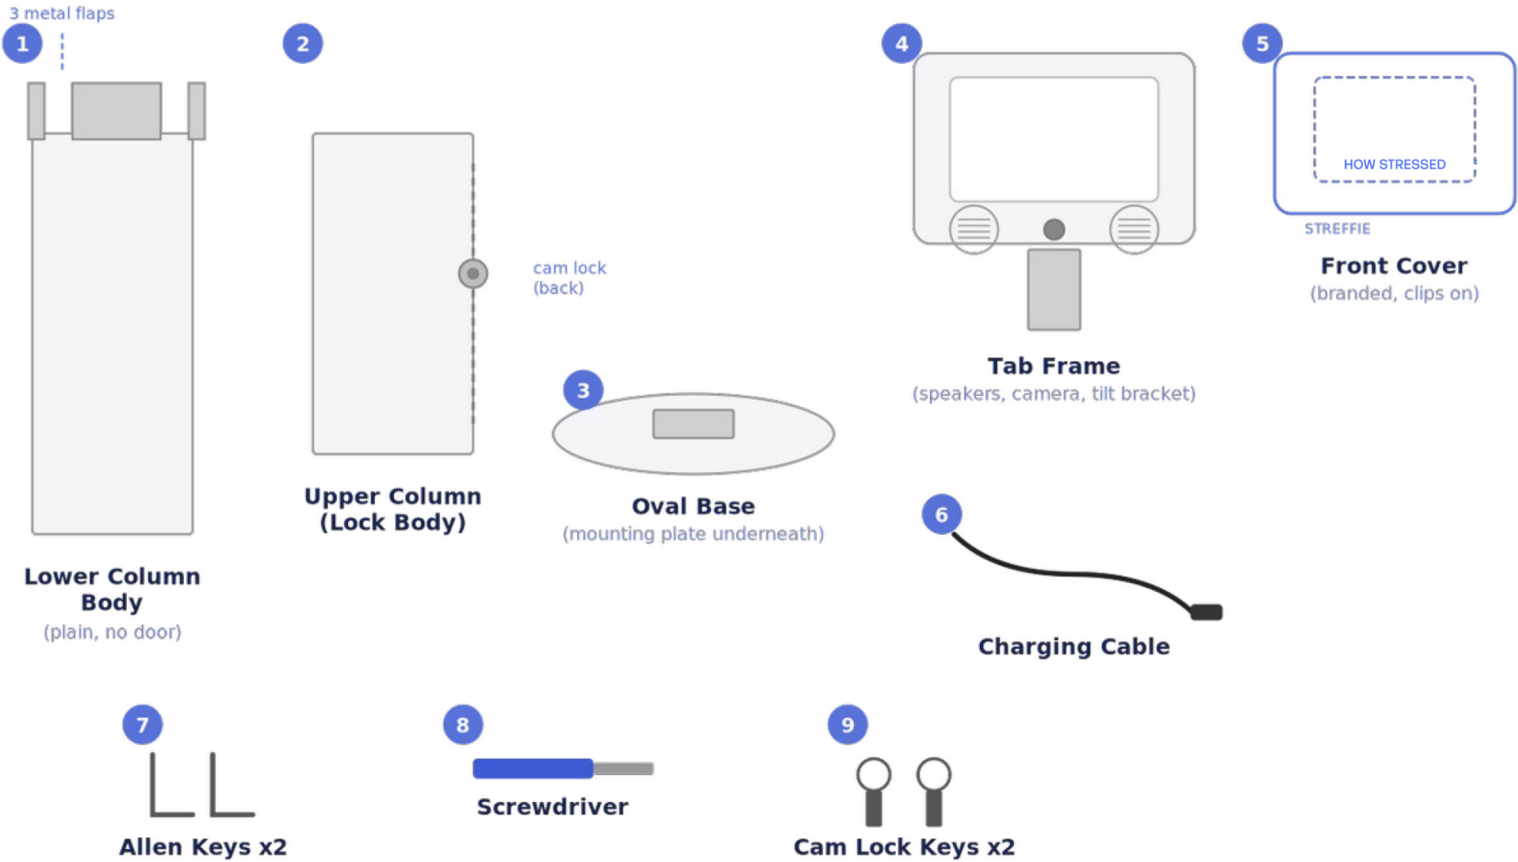


All 9 kiosk components at a glance

Section 2: Tools You Will Need

- Allen Key (hex wrench) - for the base bolts.
- Screwdriver with Phillips head bit - for securing the column sections.

Section 3: Assembly - Step by Step

Go through the steps in the order listed. Do not skip ahead. Each step below shows a diagram with instructions. The full assembly takes under 30 minutes

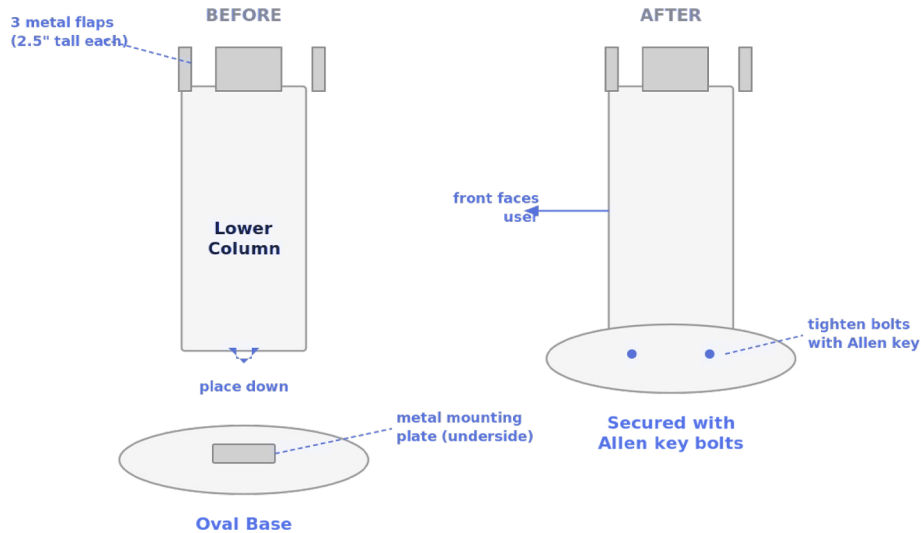


Step 6: Attach Lower Column Body to Oval Base

Place the oval base on a flat, hard floor. The base has a metal mounting plate on the underside with screw holes. Lower the lower column body straight down onto the base, aligning it with the mounting plate. Make sure the front of the column points in the direction users will stand.

Use the Allen key to tighten the screws through the base holes until firm


NOTE: Always assemble on a flat, hard floor. Do not assemble on carpet or uneven ground.

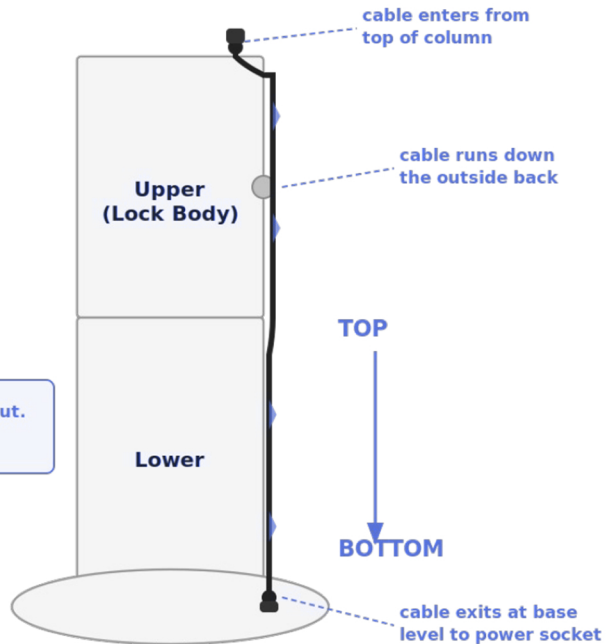

Step 3: Route the Charging Cable

Feed the charging cable in through the top of the upper column. Route it down the back of the column to the base. The cable runs along the outside back of the column. Keep it straight and taut so it does not catch or snag.

NOTE: Do not bend or pinch the cable sharply at any point. A pinched cable can stop working or become a fire hazard.

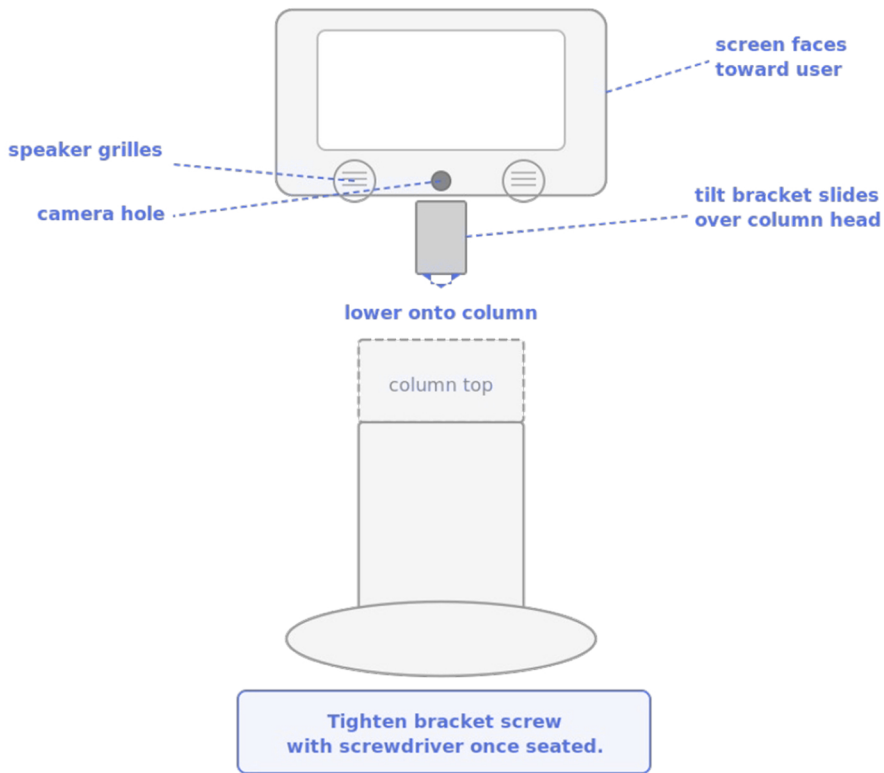

Step 4: Mount the Tab Frame

The tab frame has a metal tilt bracket on its back. Hold the frame with both hands and lower it onto the top of the upper column, sliding the bracket over the column head until it seats. The screen opening should face the direction users stand. Both speaker grilles should be visible from the front.

Once lined up, tighten the bracket screw with the screwdriver.

Step 5: Connect the Charging Cable to the Tablet


The charging cable comes down from the tilt bracket area at the top. Plug the cable end into the tablet's charging port at the back of the tab frame. Tuck any extra cable length behind the tilt bracket so it stays out of sight from the front.

STEP 7: BACK

STEP 6: FRONT



PRESS ALL 4 CORNER CLIPS
UNTIL THEY CLICK INTO PLACE

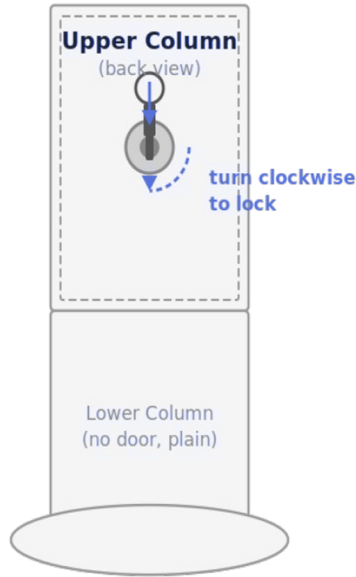

Store keys safely. Do not leave in lock.
Keep both copies in separate locations.

Step 6: Clip the Branded Front Cover On

Take the white printed cover. It has the Streffie logo on the left and 'How Stressed Are You Today?' on the right. Line it up over the tab frame so the screen window sits over the tablet screen.

Press each of the corner clips in firmly until you feel or hear them click into place.

Step 7: Lock the Back Door and Store the Keys

The upper column (lock body) has a door on the back with a cam lock. Insert the key and turn it clockwise to lock. This secures the cable and

Put the keys somewhere safe - not in the lock. Keep both copies in separate locations.

NOTE: If both keys are lost, the back door cannot be opened without force. Keep copies separate.

Section 4: Safety

Placement

- Put the kiosk on a flat, hard floor. Carpet and uneven surfaces make it unstable.
- Keep it away from doorways, stairs, or anywhere it could be knocked over.
- Leave at least 3 feet of clear space in front so users can stand comfortably.
- Avoid direct sunlight on the screen - it affects the camera and washes out the display.
- Do not place it directly under a harsh overhead light that shines into the camera.

Power and Electrical

- Use only the cable that came with the kiosk. Do not replace it with a different one.
- Plug into a dedicated socket. Do not share it with high-draw appliances.
- Use a surge protector if one is available.
- Do not run the cable under a mat or rug where it could be pinched.
- Switch off and unplug the kiosk if it will not be used for more than 48 hours.

Moving the Kiosk

- Always have two people carry the assembled kiosk - one at the column, one at the base.
- Do not drag it across the floor. Lift it fully.
- Do not lean on it or push it from the sides.
- Keep the cam lock locked whenever the kiosk is in use.

Children and Users

- Use of the kiosk is entirely voluntary. Nobody should be made to use it.
- Do not allow children to climb on or push the stand.
- The camera is for the stress scan only. It does not record or store any video.

Section 5: Care and Maintenance

Cleaning

- Wipe the column and base with a dry cloth or a lightly damp one. No sprays or harsh chemicals.
- Clean the screen with a soft microfibre cloth. Never spray liquid directly on it.
- Do not use abrasive materials on the painted surfaces.

Weekly Checks

- Check that the column join screws are still firm. Tighten lightly if needed.
- Make sure the base bolts have not worked loose, especially in high-traffic areas.
- Confirm the charging cable is plugged in and the tablet is charged.
- If the screen is unresponsive, hold the power button for 10 seconds to restart.

Software Issues

If the app is not opening, the scan is not working, or the screen is anything.

Call or write to Solh Wellness directly:

sales@solhapp.com | atishay@solhapp.com





Address: 3rd & 4th floor, 4259/3, Ansari Rd, Old Delhi, Daryaganj, New Delhi, Delhi, 110002

Call or write to Solh Wellness directly: sales@solhapp.com | atishay@solhapp.com